




LOD28 ASSEMBLY INSTRUCTIONS

877-263-5737
www.buzzseating.com

IN THE BOX COMPONENTS




Pneumatic Cylinder



Base



Caster (Qty. 5)



**Seat Plate
(Mechanism)**



Seat Cushion



**Seat Plate Screw
(Qty. 4)**




Flat Washer (Qty. 4)



Allen Wrench


STEP 1

Insert 5 casters into base, push hard until you feel or hear the caster snap into place.

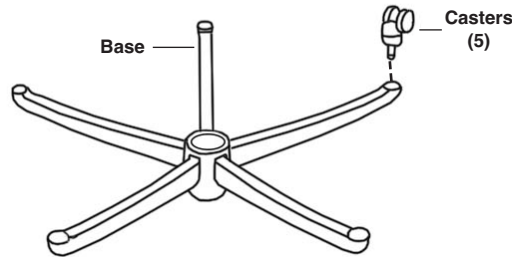


STEP 2

Attach seat plate to seat cushion using 4 seat plate screws and 4 flat washers. FULLY TIGHTEN SCREWS USING ALLEN WRENCH.

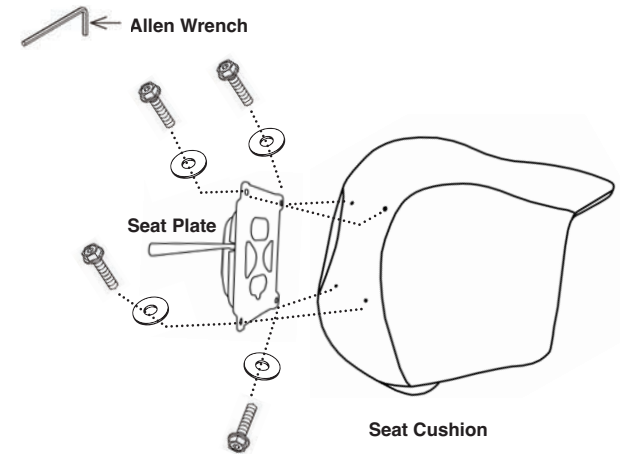

STEP 3

Insert pneumatic cylinder into base, place assembled seat on top of pneumatic cylinder and apply downward pressure.

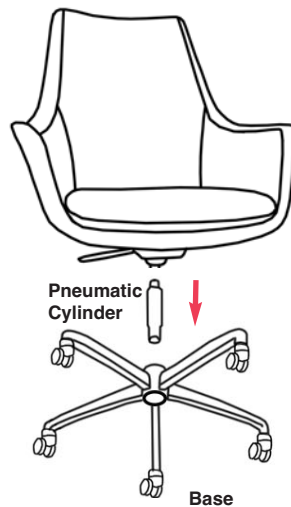

SEAT PLATE MECHANISM

Slide button forward for fixed position or slide button back for passive movement.

