





Dillon Grade 1/Polyurethane

For samples please contact Culp Inc. Contract Fabrics: (336)-889-5161 / culpcontract.com

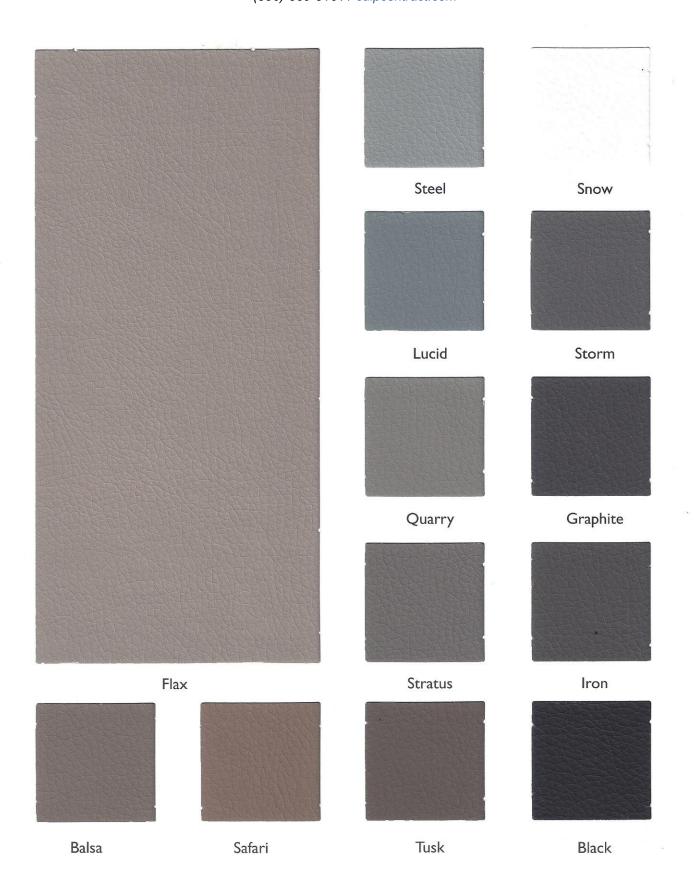

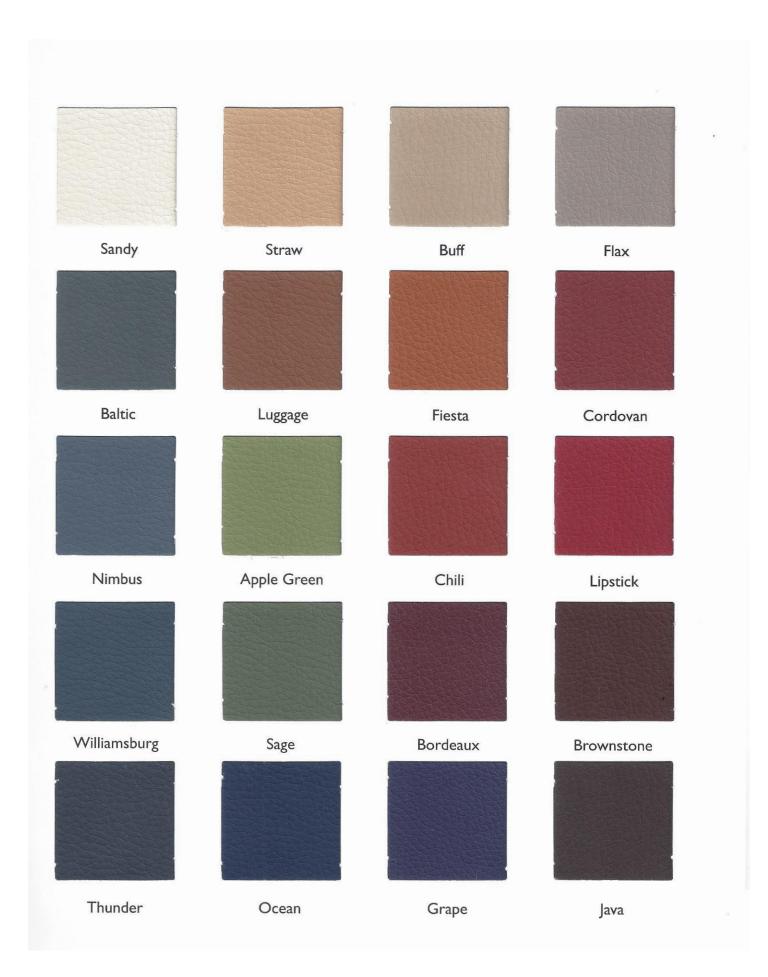

Dillon

Content:

100% Polyurethane

Backing:

89% Polyester, I I% Rayon

Finish:

Antimicrobial - silver ion technology

Weight:

27.2 oz. per linear yard

Width:

54"

Abrasion:

Heavy Duty - Exceeds 200,000 Cycles

(Wyzenbeek - Cotton Duck Abradant) (ASTM D4157)

Light Fastness:

Class 4/200 hrs. min. (AATCC16A)

Color Fastness:

Class 4 (ASTM D3597, AATCC 8) Wet Class 4 (ASTM D3597, AATCC 8) Dry

Physical Properties:

130 lbs. warp, 113 lbs. weft (ASTM D5034) Breaking Strength

47 lbs. warp, 55 lbs. weft (ASTM D4034) Seam Slippage

50,000 cycles (CFFA 10 Flex Resistance)

Pass (CFFA 6a) Cold Crack Pass (ISO 1419 - Pass 5) weeks

Passes:

California Tech. Bulletin #117-2013

UFAC Class I NFPA 260 Class I MVSS 302 Pass IMO A. 652(16) 8.2

Cleanability:

WS - Both water and solvent based solutions.

This fabric is made in China.

For samples or further information, please contact:

Culp, Inc.

Contract Fabrics

1823 Eastchester Drive High Point, NC 27265 Phone: (336)-889-5161 Fax: (336)-899-7848

www.culpcontract.com

CULP

4-11-2024